


TF1700-ILI

1.Specification

Model	TF1700-ILI
Screen Ratio	5:4
Foil Size	See below attached
Touch Zone Size	See below attached
Controller Size	See below attached
Tail direction	Short/Bottom Side
Tail length	40mm
Base material	PET foil
Light Transmittance	≥ 89%
Fixing options	Permanent
Inductive method	Improved projected capacitive technology
Touch accuracy	±2mm
Touch Points	10 points
Thru-glass capability	Not More than 8mm
Calibration method	Automatic
Response time	<10ms
Frame scan frequency	120FPS
Lifetime for foil	9 Years
Temperature Range	-15°C to + 75°C
Working Environment	0% to 95%RH (Unaffected by condensation)
OS compatibility	Windows XP ,Windows 7, 8, and 10 (32 / 64)
	MAC OS X Lion (Authorization Required)
	Linux (Kernel version above 3.8)
	Above Android 4.0 (Kernel version above 3.1)
Connection Port	USB 2.0
USB cable length	1200mm
Drive Compatibility	drive-free, plug and play
Working voltage	5V USB
EMC	EN61000-6-1:2007,EN61000-6-333:3:2007+A1:2011
Power Consumption	<0.5W
Patents	ZL200910181699.5 PCT/CN2013/084548
Certifications	CE (GR2107/010845CC), FCC (STE120904208), RoHS ((UST-ROHS-0969)

*This device complies with Part 15 of the FCC Rules Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2)this device must accept any interference received, including interference that may cause undesired operation.

2. Drawing

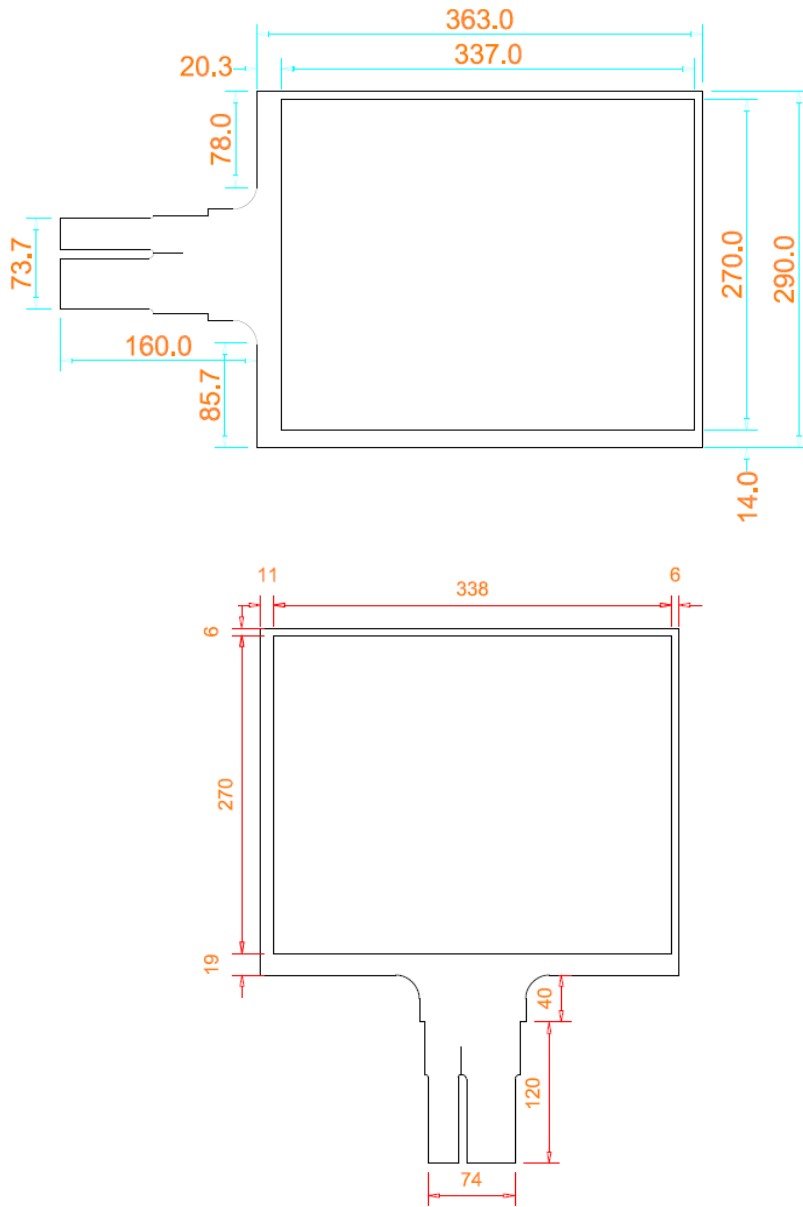

3.IC Dimension:

