## Top View

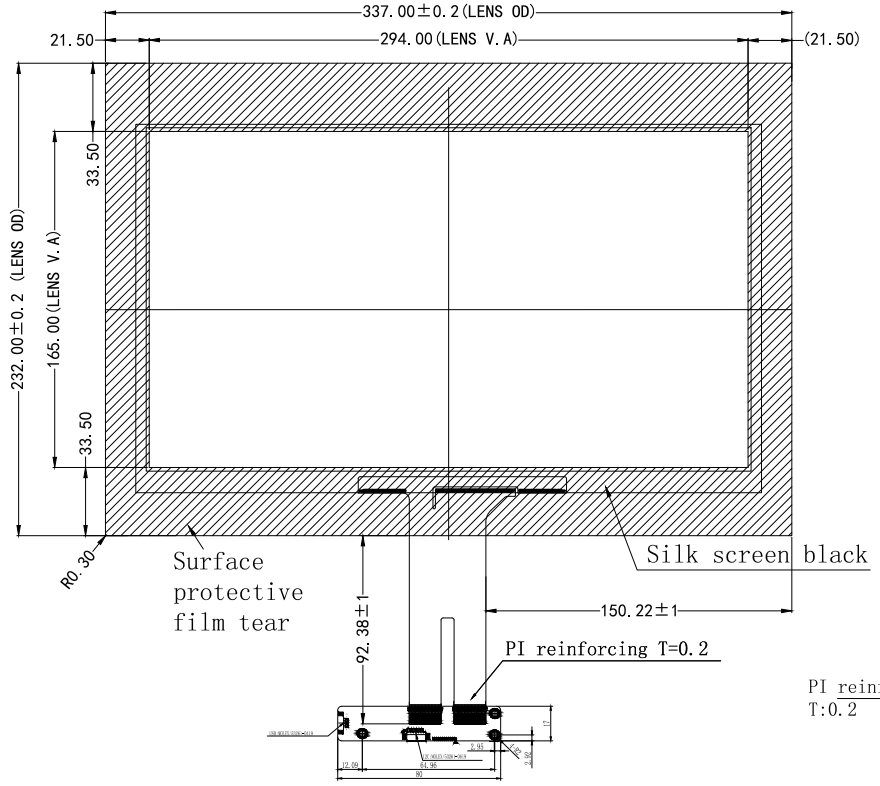


## Side view

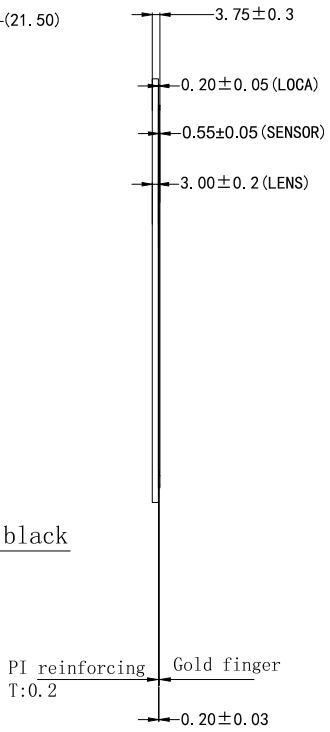


## Bottom view

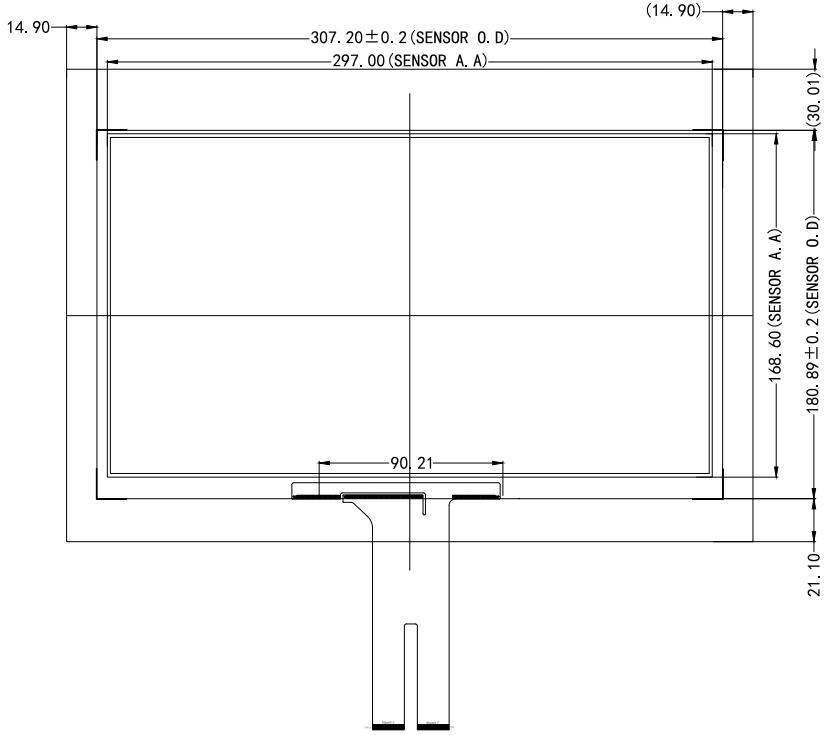




J1(USB )

| PIN | Define |
|---|---|
| 1 | VDD/5V |
| 2 | D- |
| 3 | D+ |
| 4 | GND |

Technical parameters:

1. Product structure:
COVER Glass + ITO Glass + FPC
2. Surface hardness: greater than or equal to 6H
3. Transmittance: greater than or equal to 85%
4. ICI2510, c2.p1.v1 (channel TX50*RX28)
5. Working environment: - 10 ℃ ~ + 60 ℃, 90% RH or less)
6. Storage condition: - 20 ℃ ~ + 70 ℃, 90% RH or less)
7. The size tolerance is ± 0.2mm

Touch Panel Structure

| | | |
|---|---|---|
| TOP | | |
| -------Cover | | 3.0mm |
| -------UV | | 0.2mm |
| -------ITO | } | 0.55mm |
| -------Sensor glass | | |
| -------ITO | | |
| BOTTOM | | |

TC133003ACJ

| | | | |
|---|---|---|---|
| | | | Product Name: 13.3 " Projected capacitive touch screen |
| Material | Weight | Unit | Product No. PCT1330 |
| Glass +Glass | | mm | Drawing No. |
| Sheet 1 of 1 | | | |